


Medium Duty Impact Traffic Door

Chase SC 3000 Series



Chase SC 3000 Series Solid Core Doors allow you to create your own personalized look with a virtually unlimited selection of high pressure laminates, stainless steel and .032 thick aluminum. These doors provide durability with aesthetic appeal. Café style door with gate hinge also available.

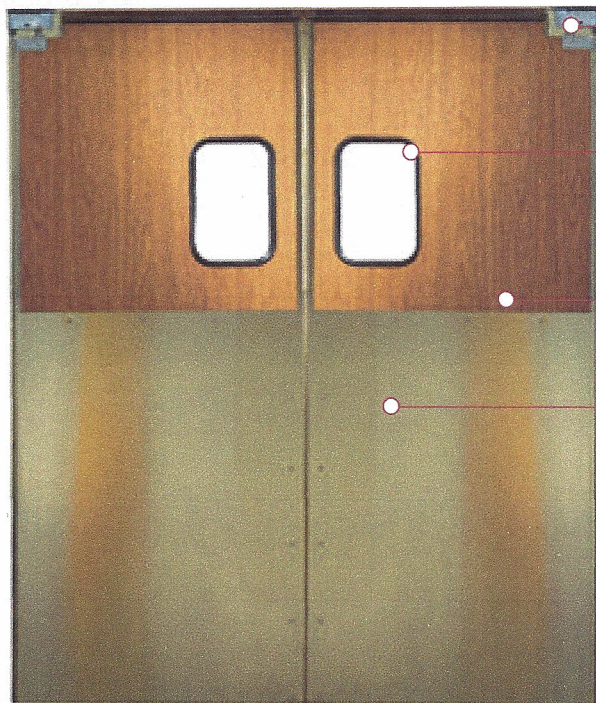



Model SC 3002

Hinge – Proven hinge system mounts to the jamb with offset cam system and hardened rollers, for years of service with minimal maintenance.


Window & Frames – Each window is 1/4" polycarbonate with either a vacuum formed frame or gasket. All windows are factory installed. 9" x 14" is standard, additional sizes are available.

Door Panel – The doors are constructed with a 3/4" 7-ply plywood for structural integrity.


Impact Plates – Stainless steel impact plates, standard on the 3002 model, are screwed to both sides of the door's surface.

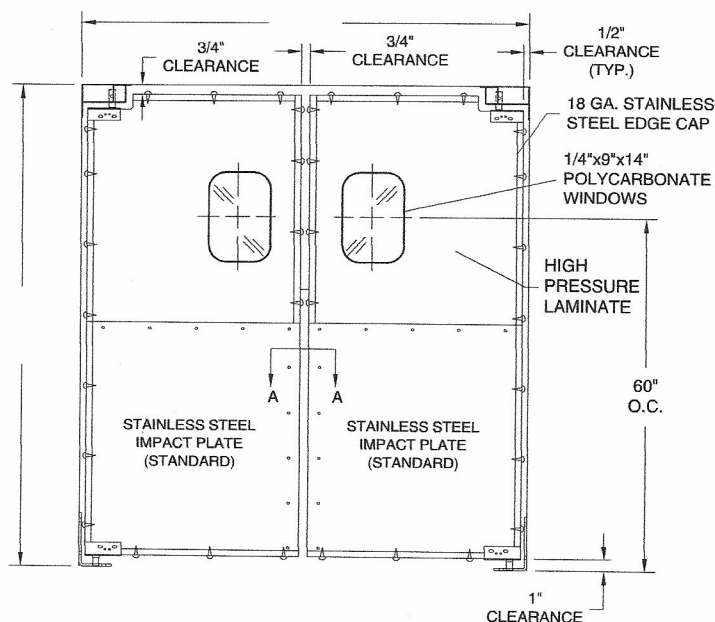


Edge Capping – Standard 18 gauge stainless steel edge capping presents a clean, finished appearance and extra edge protection.



Gasketing – Optional perimeter gasketing provides a positive seal for thermal and visual separation.



E Hinge – Classic "E" hinge has a removable cover for easy maintenance.




C Hinge – By removing the cover and screws, the "C" hinge can be easily adjusted without removing parts.


Applications	Environment	Options
<ul style="list-style-type: none"> Industrial Restaurant Retail Supermarket 	<ul style="list-style-type: none"> USDA Accepted Personnel Interior 	<ul style="list-style-type: none"> Lower Hinge Guards Window Options Impact/Kick Plates Teardrop Bumpers Cart Guards Gasketing Surface Mounted Locks

Product Options


Proline™ & SC 3000 Options




Cross-linked Polyethylene Impact Bumpers provide spring action, impact absorption, and protects the door surface from heavy traffic loads – recommended for high traffic or heavy motorized traffic applications.




Impact Plates are available in stainless steel, galvanized steel, ABS plastic or Kydex®.




Classic "E" hinge has a removable cover for easy maintenance.




The "C" hinge can be easily adjusted after removing the cover and screws.




Patented V-Cam hinging system has a 250° hinge that swings 125° in each direction.



Lower Hinge Guards are recommended for high abuse applications.



Standard heavy-duty bottom hinge pin stabilizes the panel in the frame.



Surface mounted locks are available for single panel Chase SC 3000 Series Doors.

Proline Window Options

Each window is 1/4" polycarbonate with a vacuum formed frame. All windows are factory installed.

Proline window sizes are as follows:

- 10" x 16" - Standard for a 24" and 30" panel
- 16" x 16" - Standard for a 36" or larger panel
- 10" x 30" - Available for a 24" and 30" panel
- 12" x 18" - Panel must be 36" or larger
- 17" x 23" - Panel must be 36" or larger
- 23" x 23" - Panel must be 36" or larger

Additional Product Options

- Gate/café style hinges
- PVC or extruded aluminum bumper strips
- Hold open device
- Push plates and pull handles


Chase Window Options

Each window is 1/4" polycarbonate with either a vacuum formed frame or gasket. All windows are factory installed. When selecting a window option, please keep in mind that the panel must be wider than the window by 11". Consult factory for custom shape or sizes.


Chase window sizes are as follows:

- | | |
|---------------------|-----------|
| 9" x 14" - Standard | 30" x 18" |
| 14" x 16" | 18" x 30" |
| 20" x 15" | 6" x 20" |
| 15" x 20" | 16" x 16" |

FRP Colors Available for Proline Doors

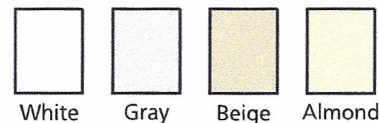

Colors Available for Proline Doors

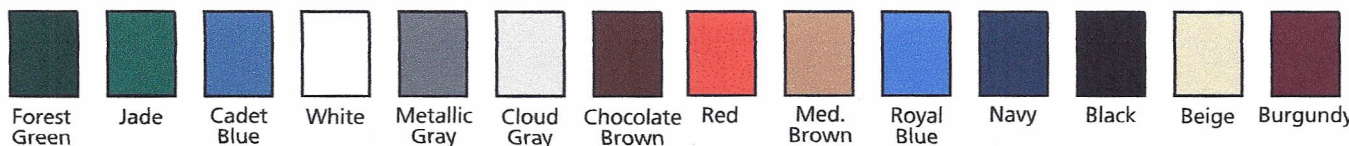

Color shown may differ slightly from actual color. Consult factory for exact color match.