

IXP Impactor™

Two Directional Impactable
Fiberglass Single Slide
Cooler/Freezer Door System

Data Sheet

Model IXP 1500



OPTIONAL BREAKAWAY PANELS



Available in manual operation and without breakaway panel.

FEATURES

- Standard high dual speed operation (48"/sec open - 24"/sec close).
- Strong impactable panel with a full 90 degree swing capability in both directions, while door is opening or closing.
- High impact composite reinforced panel material.
- 4" fully insulated impactable panel.
- Standard stainless steel header and rail with epoxy coated roller trucks.
- Integrated and fully protected self-regulating heater system.
- No floor hardware.
- Steel reinforced polyurethane drive belt.
- No reversing edge extrusions to damage.
- Integrated cut-off switch to stop door movement if panels are impacted.
- Standard NEMA 4 fiberglass control box.



Model IXP 1500

DESIGN AND CONSTRUCTION

DOOR SIZES

- Minimum: 3' x 6" x 6'0"
- Maximum: 1'0"0" x 15'0"
- *Other sizes available - consult factory.*

PANEL CONSTRUCTION

- Sealed and unitized design.
- High impact fiberglass reinforced composite shells.
- 1/8" thick high impact fiberglass composite angles along all vertical panel edges.
- USDA approved material.
- Full perimeter adjustable gaskets.

BREAKAWAY PANEL CONSTRUCTION (Optional)

- Full impact capable panel allow for a 90° swing capability in both directions.
- 1/8" thick, 48" high impact capable polymer plating on both sides of breakaway panel.
- Panel provided with breakaway reset assist.
- Automatic breakaway power cut-off switch.

TRACK CONSTRUCTION

- Stainless steel header and rail.
- USDA approved epoxy coated roller trucks and steel hardware.
- Nylon rollers with lubed for life bearings.
- Steel reinforced polyurethane drive belt.

OPERATION

- Electric:
 - 48" ips* opening
 - 24" ips closing
 - **Inches per second.*
- PLC (Programmable Logic Controls).
- VFD (Variable Frequency Drive).
- 208/230/460 volt, 3 phase power required.
- Manual.

ELECTRIC SYSTEM

- High output, high torque electric drive system powered by 3/4 hp totally enclosed motor.
- NEMA-4 fiberglass control box.

PERFORMANCE FEATURES

- Door panel reversing for instant stop/reverse through main control box.
- Manual operation.

INSULATION


- 4" thick closed cell, R25.

WARRANTY

- 1 year limited warranty on parts and labor.

OPTIONS

- Non-breakaway panel construction.
- Jamb capping.
- Mirror image header.
- Wash down grade operator.
- Pedestrian opening (remote push button station for partial opening - automatic time delay close. All adjustable).
- Extra pull cord or single push button activation (2-pull cord standard).
- Photoeye activation or reversing photoeye.
- Radio control activation.
- Loop detector system activation.
- Motion sensors.
- Presence sensors.
- Pre-announce to close kit (light/alarm/or combo).
- UNI-directional sensors.
- Sensor mounting brackets.
- Strobe lights.
- Shroud for rail.
- Windows-2 lite.
- Future power.

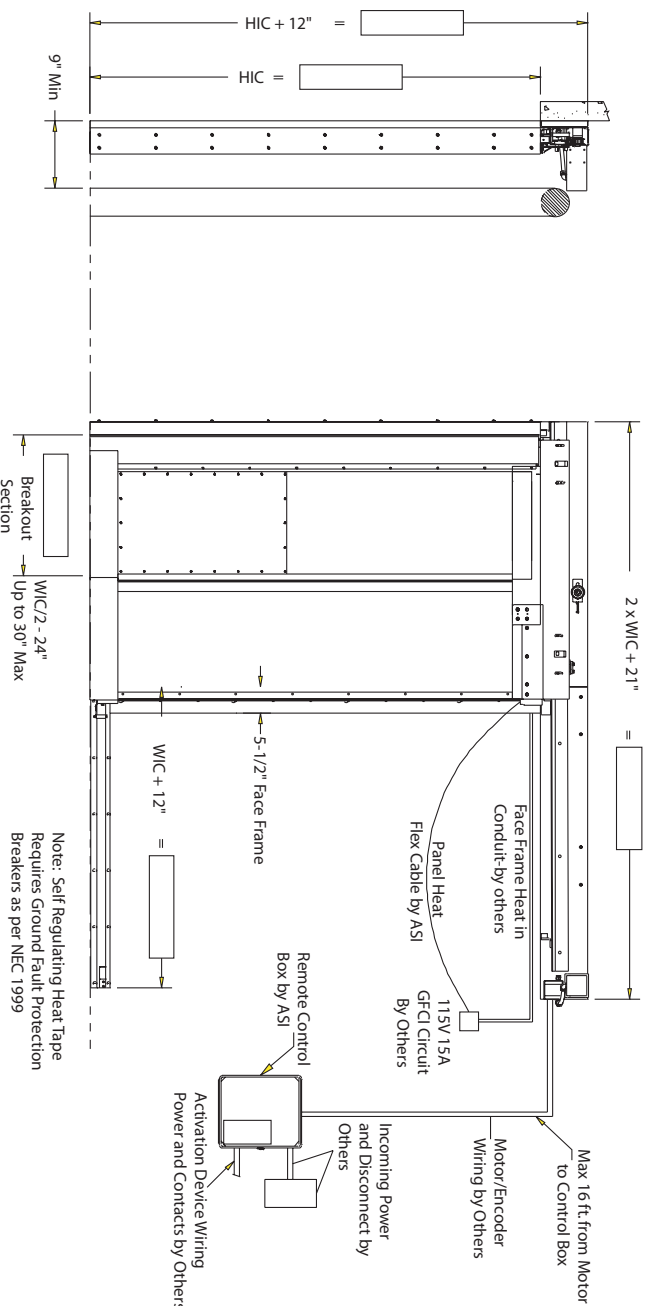

Patent Pending

For complete Architectural Specifications contact ASI or visit www.asidoors.com



ASI Technologies, Inc.

5848 N. 95th Court • Milwaukee, WI 53225 • (414) 464-6200 • (800) 558-7068 • FAX: (414) 464-9863 • www.asidoors.com

Consistent with our policy of continued product improvement, we reserve the right to change product specifications without notice or obligation.

IXP 1500 1/2005R

©2004 ASI TECHNOLOGIES, INC. • PRINTED IN U.S.A.