

Infitting Hinged Door

White Stucco Metal

Cooler or Freezer - Single or Double

Data Sheet

Models 413-413D



FEATURES


- A durable door for heavy personnel traffic, hand truck passage and low temperature operation.
- Panel with pour-type polyurethane insulated core and a 24 gauge white stucco-embossed finish. Available in 20 gauge galvanized steel, stainless steel, and other colored metals. U.S.D.A. approved.
- Synthetic grease resistant gaskets at four sides for positive seal.
- Internal 1/4" steel mounting plates for all hardware anchoring.
- Heavy-duty cam lift hinges, lockable latch, strike and inside release.
- Freezer door provided with "No Frost" heater cable system. Fully adjustable thermostatic control.



enviro®

Cold Storage Doors

Model 413 Shown

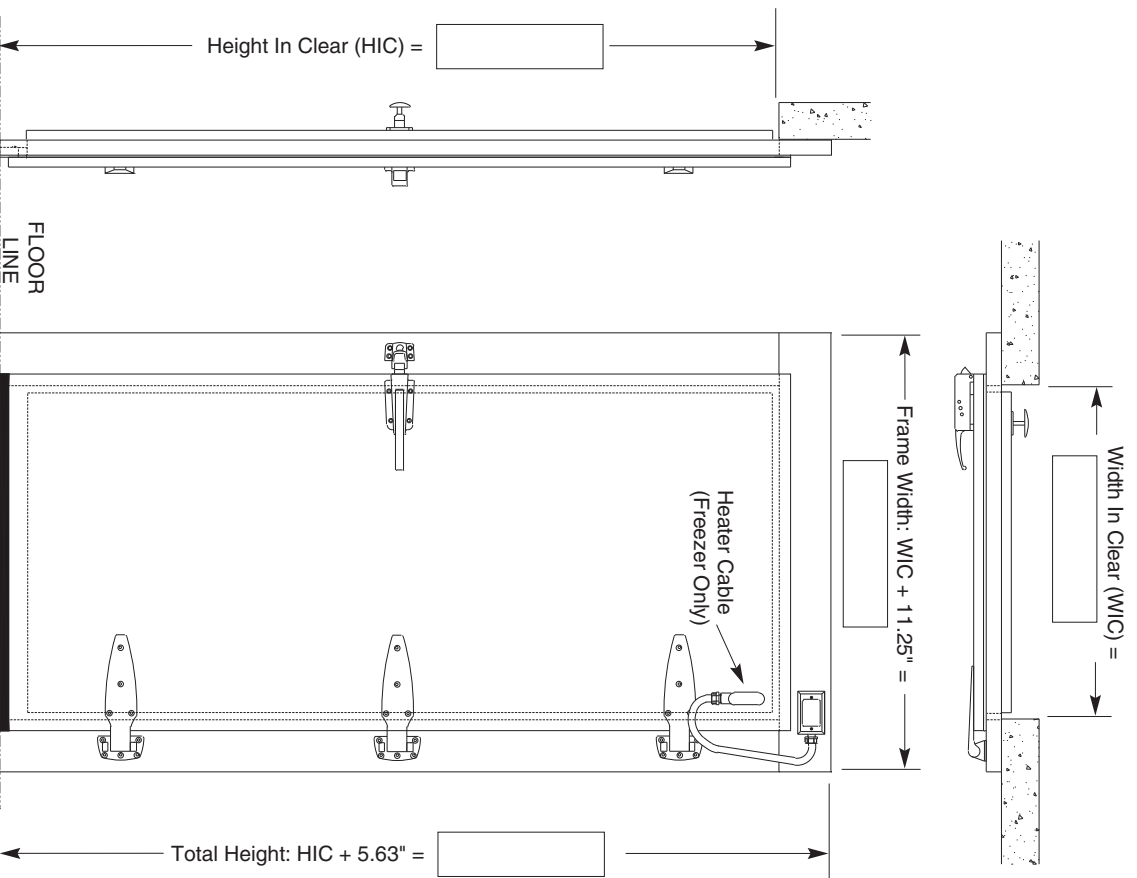

DESIGN AND CONSTRUCTION

DOOR SIZES

Single Doors:

- Minimum: 2'6" x 6'6"
- Maximum: 6'0" x 8'0"

Double Doors:

- Minimum: 5'0" x 7'0"
- Maximum: 8'0" x 9'0"

PANEL CONSTRUCTION

- Structural frame of wood fully supporting the panel's perimeter.
 - Internal 1/4" steel mounting plates for all hardware anchoring.
 - Panel to be clad with a minimum of 20 gauge galvanized steel, stainless steel, or 24 gauge steel with white stucco-embossed finish.
 - Panel core filled with pour-type polyurethane insulation.
 - Full perimeter gaskets.
- OPERATION**
- Manual.
- PERFORMANCE FEATURES**
- Manual inside emergency release.
- INSULATION**
- 4" (6" for freezers) poured polyurethane foam.
- OPTIONS**
- Extension of jamb up to 10" std.
 - Matching inside frame.
 - Galvanized or stainless steel kickplates (16 or 20 gauge) for back and front of door panels, frame and/or jamb extensions and trim. Flat kickplates only on door panel, wraparound available on frame.
 - Heat mat to prevent condensation on thresholds.
 - Emergency exit devices.
 - High sill.
 - Windows: 12"x12", 2 or 3 lite, heated or unheated.
 - Color (consult factory).
 - Chrome hinges.
 - Stainless steel hardware.
 - Door closers.

- R33 or R50.
- "K" factor of .12 at 75°F.

WARRANTY

- 1 year against defects in material or workmanship.



5848 N. 95th Court • Milwaukee, WI 53225 • (414) 464-6200 • (800) 558-7068 • FAX: (414) 464-9863 • www.asidoors.com

For complete Architectural Specifications contact ASI or visit www.asidoors.com



413-413D 11/2009R